


Operation manul of combination machine

Tension The Saw Belt



Tips: Please carefully read the operation after installation, pay attention to wear protective gloves.

- 1- Open the door , Turn the handwheel adjust the saw angle nearby 30° , then carried the handle to the highest.

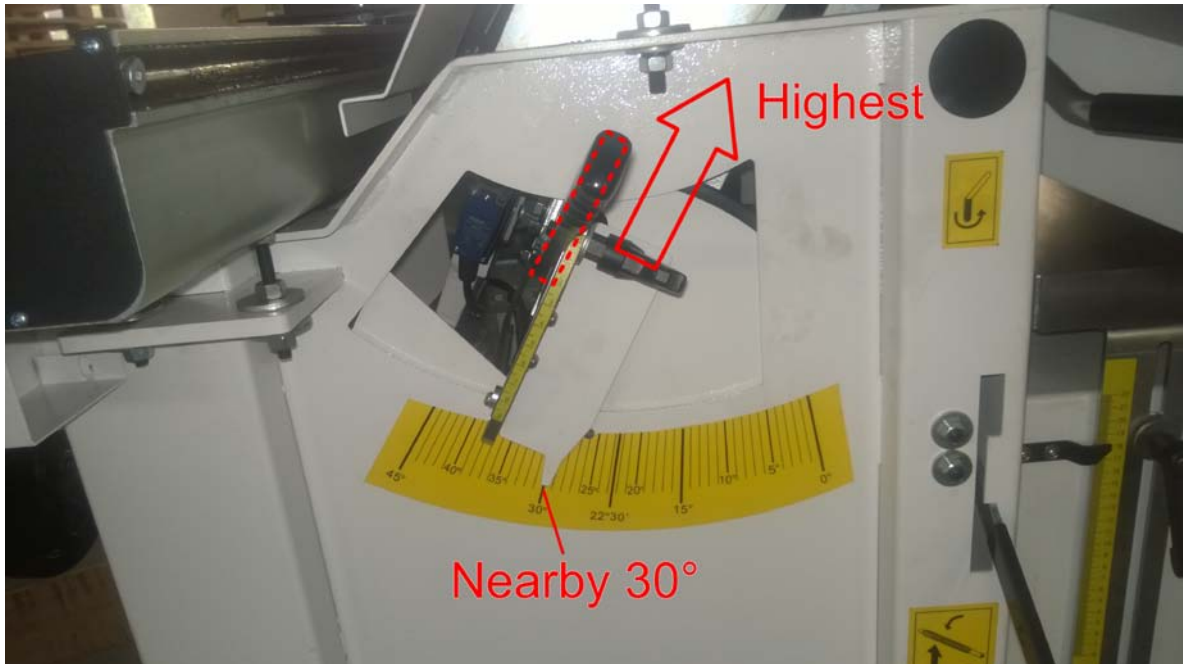

- 2- Put a wood stick(longer than 1200mm) into the machine,across the belt press on the saw motor pulley.



3- Press the wood stick and tight the screw.

